

E-Series Surface Mount Mixer

5 - 750 MHz

EMRSL-1WH

V3.00

Features

- LO Power: +17 dBm
- Up to +14 dBm RF
- Surface Mount

Specifications @ 25°C

Frequency Range		
RF		5 - 750 MHz
LO		5 - 750 MHz
IF		DC - 750 MHz
Conversion Loss (dB)		
10 - 375 MHz	Typical	Maximum
5 - 750 MHz	7.0	8.5
	7.8	8.8
Isolation (dB)		
LO to RF	Typical	Minimum
5 - 50 MHz	55	40
50 - 375 MHz	43	22
375 - 750 MHz	28	20
LO to IF		
5 - 50 MHz	52	30
50 - 375 MHz	38	22
375 - 750 MHz	29	20

Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+ 14 dBm
DC Polarity	Negative


Ordering Information

Part No.	Packaging
ERMSL-1WH	Tubes
ERMSL-1WHTR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	200 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 Seconds)	260°C

SM-24

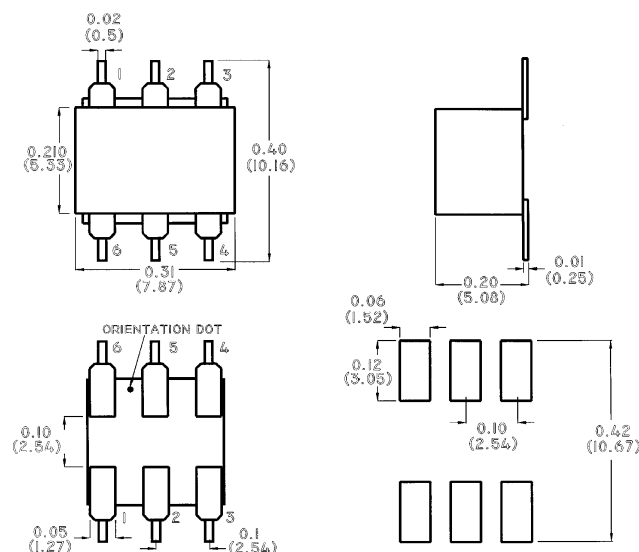

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
LO	1
RF	4
IF	5
Ground	2,3,6

Specifications Subject to Change Without Notice.

S 0548 B

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020